


# Micromar 40 EWR. Digital Micrometer


## Functions

- RESET (set display to zero)
- ABS (display can be set to zero without losing reference to ORIGIN)
- mm/inch
- ORIGIN (for entering a numerical value)
- LOCK function (key lock)
- TOL (Tolerance and warning limits)
- DATA (data transmission via connection cable)
- HOLD (storage of measured values)
- High contrast analog display
- Stainless spindle is hardened throughout and ground
- Spindle and anvil are carbide tipped
- Rapid drive
- Ratchet is integrated in the thimble
- Lacquered steel frame, heat insulated
- SoftwareMarCom Professional free download:  
[www.mahr.com/marcom](http://www.mahr.com/marcom) (only for Mahr data cables and wireless systems with USB and RS232 interface)
- **Height of digits:** 10 mm
- **Data interface:** USB, Digimatic
- **Energy supply:** Battery life approx. 2 years
- **IP protection category:** IP 65
- **Package contains:** instruction manual, battery, setting values, case

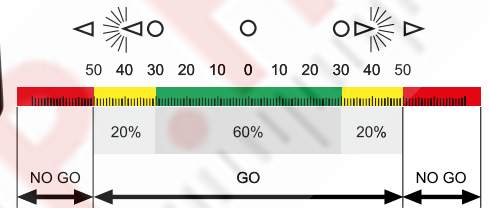

## Technical Data

Order no.	Product type	Measuring range	Resolution	Spindle thread pitch	Measuring force	Standard	Number of micrometers
4157015	40 EWR	0 – 100	0,001 / .00005"	0,5	5 – 10	Factory standard	4

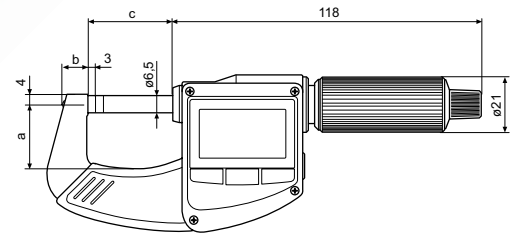

## Accessories

Order no.	Product description	Product type
4102520	Battery 3 V, CR 2032	
4102603	Data cable USB bi-directional (2 m)	DK-U1
4102606	Digimatic data cable (2 m)	DK-D1
4158000	Stand, for holding outside micrometers	41 H

